

Equipos domésticos / Domestic equipment ALKA FLOW

Ref.	Descripción / Description
RO1895	Equipo de flujo directo Alka Flow 800 GPD Direct flow equipment Alka Flow 800 GPD

Datos técnicos:

- Producción: 2,10 L/min
- Membrana de 800 GPD
- Tensión: AC 220V~50/60Hz
- Potencia: 96W
- Presión del agua de entrada: 0.1-0.4 MPa
- Presión de trabajo: 0.4-0.9 MPa
- Temperatura ambiente: 2 °C - 45 °C
- Grifo de gama alta
- Cambio de filtros muy sencillo
- Postfiltro alcalino para regular el pH
- Dimensiones del sistema:
a. 405 mm | b. 140 mm | c. 440 mm
- Peso del sistema: 11,08 kg

Features:

- Production: 2,10 L/min
- 800 GPD membrane
- Voltage: AC 220V~50/60Hz
- Power: 96W
- Inlet water pressure: 0.1-0.4 MPa
- Working pressure: 0.4-0.9 MPa
- Ambient temperature: 2 °C - 45 °C
- High quality faucet
- Easy filter replacement
- Alkaline post-filter for pH regulation
- Equipment dimensions:
a. 405 mm | b. 140 mm | c. 440 mm
- Equipment weight: 11,08 kg



Membrana ECO de 800 GPD
ECO 800 GDP membrane



Cambio de filtros en menos de 30s.
Filter change in less than 30s.



Alta producción
High production




Remineraliza el agua
Remineralizes water



Posfiltro alcalino para regular el pH
Alkaline post-filter for pH regulation



Equipo muy silencioso
Very quiet equipment

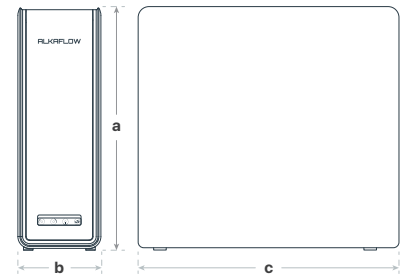

* Dimensiones aproximadas en mm.
Approximate dimensions in mm.

MEMBRANA Y FILTRO / MEMBRANE AND FILTER

Ref.	Descripción / Description
RO4149	Filtro encapsulado PCB Alka Flow Alka Flow PCB encapsulated filter
RO4150	Membrana encapsulada ósmosis inversa 800 GPD Alka Flow Encapsulated reverse osmosis membrane 800 GPD Alka Flow
RO4151	Filtro encapsulado CB+ALK Alka Flow Alka Flow CB+ALK encapsulated filter

