

REVERSE OSMOSIS 1000 GPD



Mechanical stainless steel tap

Compact design

Compact under-sink installation.

PureControl touch panel

Monitor water quality in real time with TDSS indicator. Self-diagnostic system that alerts you to any incidents. Automatic filter change notification.

PRODUCTION 2,6 L/min

Water rejection ratio: 1:0.5

Bayonet filters



DUAL CHOICE

Choose the water you want

Incorporates two independent water outlets, osmotically purified and filtered, so you can have the type of water you need at any moment.*

And if you prefer... **WATER YOUR WAY**

Mix filtered water + osmotically purified water to achieve the perfect balance according to your preferences**

What do you gain from all this?

- Hardness and mineralisation tailored to your taste.
- Balanced flavour and purity.
- Improved sustainability by reducing reverse osmosis usage when you don't need it.

* A dual-outlet tap is required. Not included. (ref. RO5031)

** An external mixing kit is required. Not included. (ref. CR1071)



Healthy hydration
High-quality purified water instantly



Pleasant taste
With a constant, clean water flow




Anti-block system
Filter replacement without interrupting the water supply



Automatic water recirculation
Always fresh and newly filtered water

Technical Data

- Production: 2.9 L/min
- 1000 GPD membrane
- Very low rejection rate: 1 : 0.5
- Premium tap
- Aqua-stop included
- Filter replacement alert and reset function
- Very easy filter replacement
- Two outlets: filtered and osmotically purified
- System dimensions (mm): a. 145 | b. 350 | c. 450
- System weight: 9.35 kg

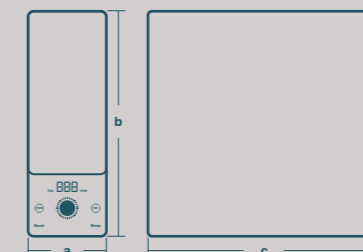

osmofilter



osmofilter

AQUARION

Power, versatility and purity in every drop