

Equipos domésticos / Domestic equipment AQUAPLUS 600


Ref.	Descripción / Description
RO1209	Equipo de flujo directo Aquaplug 600 Direct flow equipment Aquaplug 600

Datos técnicos:


- Caudal: 1,6 L/min
- Membrana: 600GPD
- Voltaje: 100-240V ~ 50/60Hz
- Presión de entrada agua: 0.1 - 0.4 Mpa
- Temperatura de agua apropiada: 5 °C - 38 °C
- Condiciones aplicables:
 - Temperatura ambiente: 4 °C - 40 °C
- Fuente de agua: agua potable
- Conexiones agua entrada 1/4"
- Conexiones agua osmotizada 1/4"
- Conexiones agua rechazo 1/4"
- Potencia total: 72 W
- Dimensiones:
 - a. 151 mm | b. 195 mm | c. 315 mm
- Peso del equipo: 4,80 kg

Features:

- Flow rate: 1.6 L/min
- Membrane: 600GPD
- Voltage: 100-240V ~ 50/60Hz
- Inlet water pressure: 0.1 - 0.4 MPa
- Appropriate water temperature: 5°C - 38°C
- Applicable conditions:
 - Ambient temperature: 4°C - 40°C
- Water source: potable water
- Water inlet connections: 1/4"
- Reverse osmosis water connections: 1/4"
- Reject water connections: 1/4"
- Total power: 72 W
- Dimensions:
 - a. 151 mm | b. 195 mm | c. 315 mm
- Equipment weight: 4,80 kg.

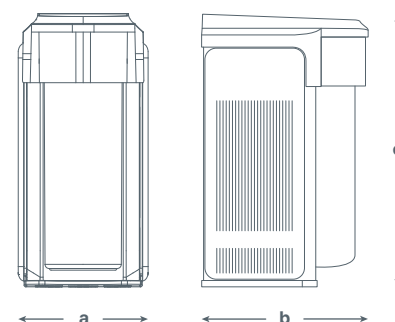


* Dimensiones aproximadas en mm.
Approximate dimensions in mm.




Membrana ECO de 600 GDP
ECO 600 GDP membrane




Indicadores y avisos
Indicators and warnings



Sistema muy compacto
Very compact system



Aviso cambio de filtro
Filter change notice



Sistema monocartucho
Single cartridge system



Diseño exclusivo
Exclusive design

MEMBRANA / MEMBRANE

Ref.	Descripción / Description
RO1212	Membrana 600GPD+carbon AQUAPLUS 600 600GPD+carbon AQUAPLUS 600 membrane