



ALKASIX


osmofilter

TECHNICAL DATA

- Model: RO1215
- Membrane: 600 GPD
- Production: 1.80 L/min
- Power supply: 100-240V ~ 50/60Hz
- Water pressure: 0.1 ~ 0.4 MPa
- Rated power: 85W
- Inlet water: drinking water
- System dimensions:
a. 150 mm | b. 374 mm | c. 461 mm
- System weight: 13,50 kg

SPARE PARTS

- RO2242: Encapsulated CP cartridge (sediment + activated carbon block).
- RO2241: 600 GPD encapsulated reverse osmosis membrane.
- RO2243: Encapsulated CB+pH cartridge (coconut carbon + alkalising cartridge).

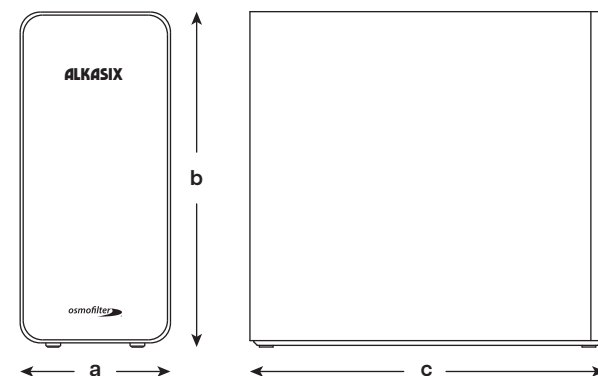

Enjoy better-tasting
water with a more
balanced pH



Distributed by:

osmofilter

Range:

PREMIUM
ONLY FOR PROFESSIONALS



Take care of
what matters most:
**THE WATER YOU
DRINK EVERY DAY**



ALKASIX

**Better flavour thanks to
water remineralisation
and alkaisation**

 **600 GPD**


 **1.80 L/min**
Ultra-fast Production

MORE FLAVOUR, MORE BALANCE, MORE WELLBEING

Thanks to its reverse osmosis system and alkaline remineralising post-filter, ALKASIX provides high-quality water with better taste and a more balanced pH.

7 FILTRATION STAGES

Advanced system designed to obtain high-quality water.

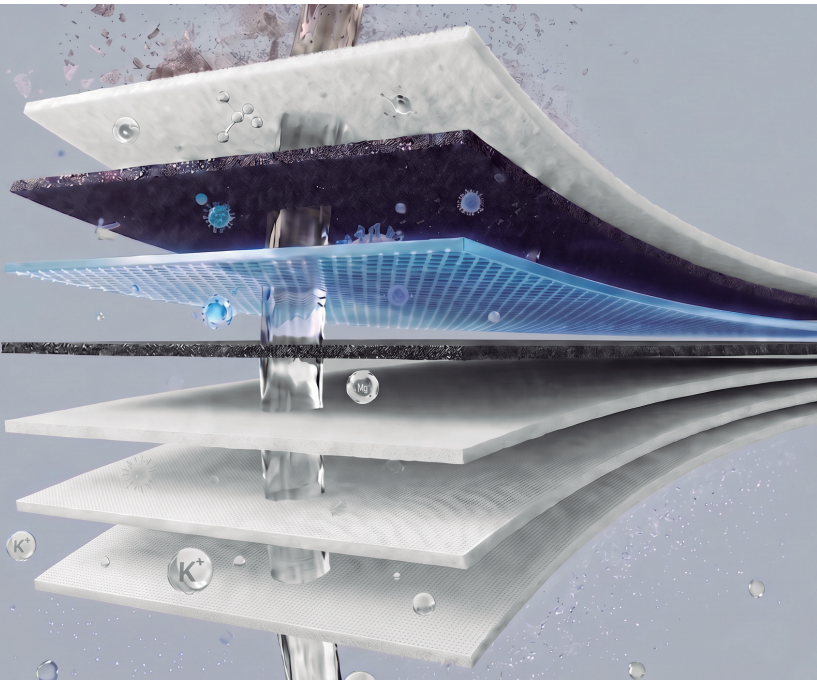

ALKALINE REMINERALISING POST-FILTER

Better taste
and a more
balanced pH.

Especially Recommended For:

- Desalinated water supplies.
- Very low-mineralised water.
- Areas with more acidic water.
- Users looking for a genuine improvement in water taste.
- Households wishing to enjoy alkaline, remineralised water.



**Remineralised Alkaline Water.
Better Taste In Every Glass.**



Purification through
reverse osmosis



More effective
hydration



Improved
digestion



Antioxidant
properties